

匯統國際股份有限公司
Huey Tung International Co., Ltd.

產品規格書 Specification

[Model : HT-3070-02/ 2015.7.8 version]



Cara Audio Corporation

No.69, Lane 762, Dingzhong Road, Sanmin District, Kaohsiung City, Taiwan, ROC.


Tel: 886-7-310 5786 / Fax: 886-7-310 0783



E-mail: carawang@hueytung.com.tw / <http://www.hueytung.com.tw>




揚聲器製品規格書

SPEAKER SPECIFICATION

型號 Model Number: HT-3070-02 (150052)

項目 Items		規格 Specification		
1	公称阻抗 Nominal Impedance	8Ω±15%		
2	最低共振周波数 Lowest Resonance Frequency	330 Hz±20%Hz Without a baffle		
3	实效周波数带域 Effective Frequency Range	F0~20KHz -10dB		
4	出力音压 Output Sound Pressure Level	78dB±3dB 1W/1M at (400,500,600,800)Hz ,AVE.		
5	入力 Input	定格入力 Rated input 2W	最大入力 Maximum input 4W	
6	磁束密度 Flux Density	-----±10% GAUSS		
7	异常音试验电压 Buzz & Rattle Test	Must be normal at sine wave 4 V		
8	动作试验电压 Operation Test	Must be normal at program source 4V		
9	极性 Polarity	/		
10	磁石尺寸/重量 Magnet Dimension/Weigh	Magnet:12.5*4 N35 Sub Magnet: /	/G	
11	连续负荷试验 Life Test	IEC-268-5 noise 2 W 96 hours	After the Test, Speaker should be meet the Outside and item 7,8	
12	耐热试验 Heat Resistance	70°C±2°C 30%-35%RH 8Hours and then room temperature 1 hours		
13	耐湿试验 Humidity Resistance	40°C±2°C 90%-95%RH 8Hours and then room temperature 1 hours		
14	耐寒试验 Cold Resistance	-25°C±2°C 24Hours and then room temperature 1 hours		
15	落下试验 Drop Test	1M 75°±2°		
16	绝缘耐压试验 Insulation Resistance	Or more 1MΩ 以上		
17	周波数特性 Frequency Response Curve	参照附图 On Other Drawing		
18	失真率 Distortion	/		
19	各部 材质	Cone Paper	Paper cone + Foam Edge	
		Voice Coil	13.28Φx8Ω 2層 SV線	
		Cap	/	
20	总重量 Total Weight	30G		
 Size:30x70mm 試作發行: 2015.7.8		Approve: Arthur	Check: John	Design: Wang

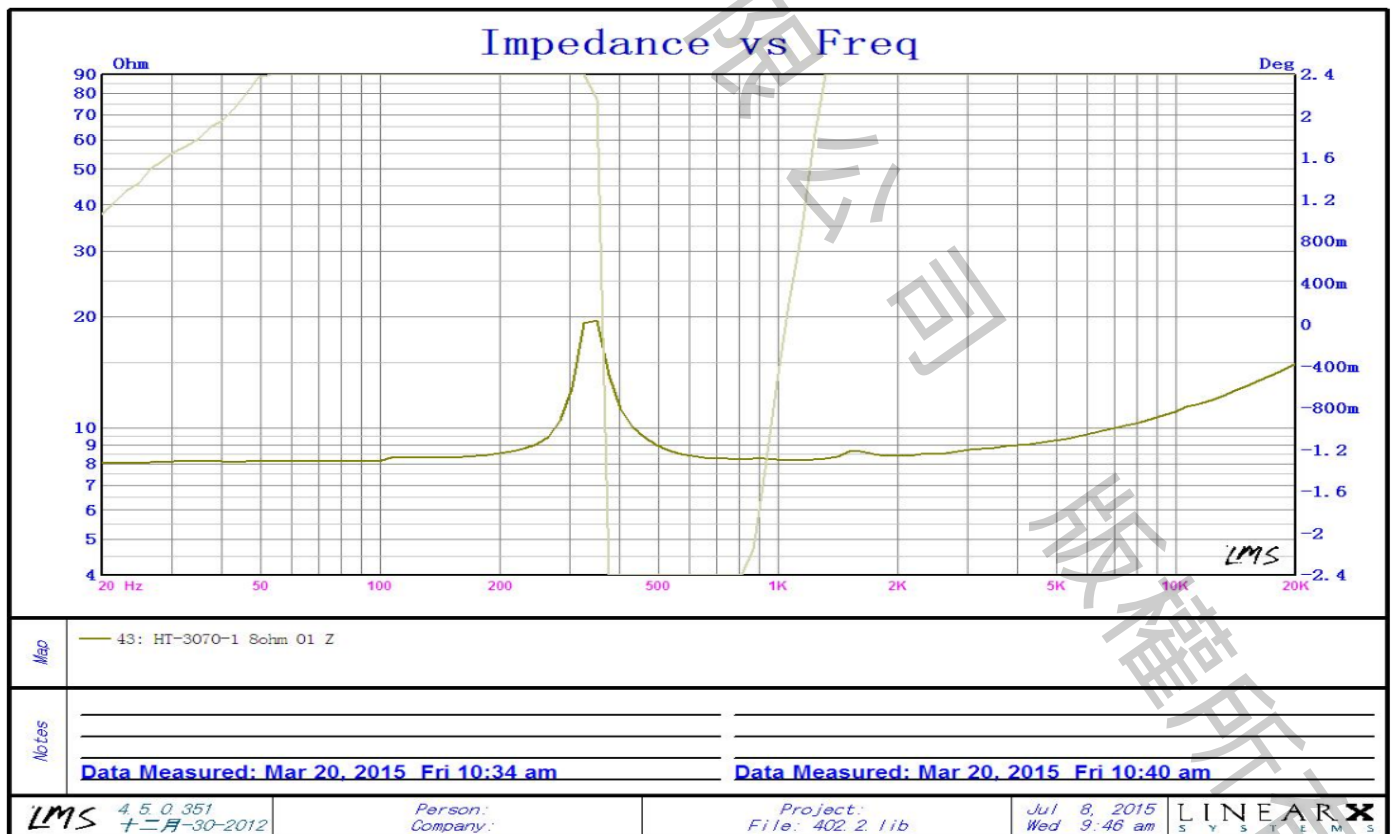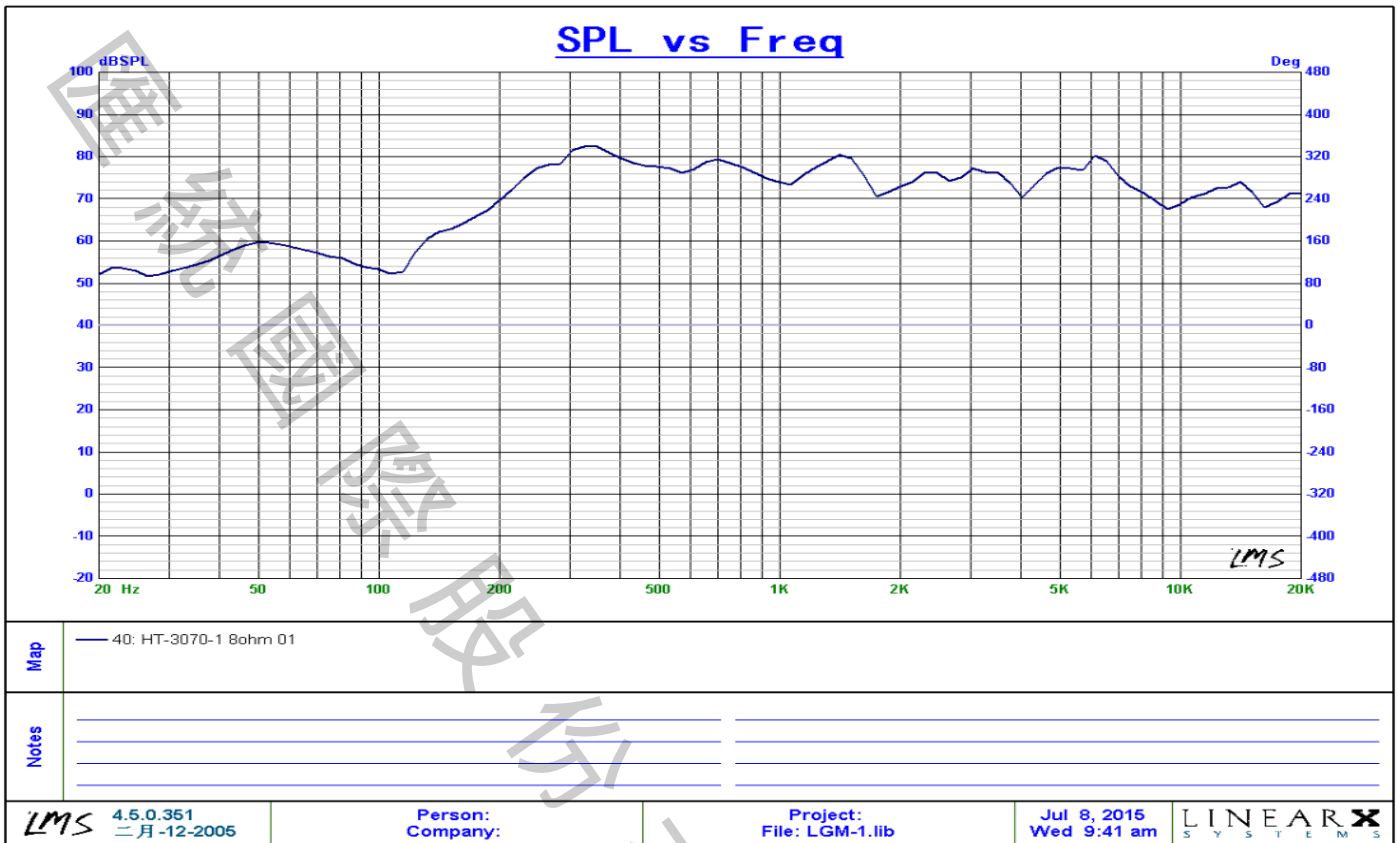

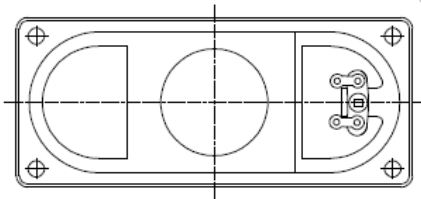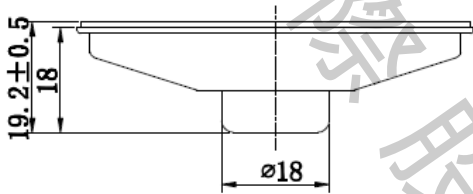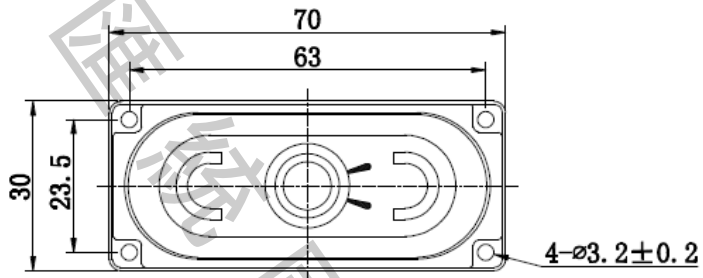

Toerance: ± 0.5

Unit: mm