



匯統國際股份有限公司

Huey Tung International Co., Ltd.

# 產品規格書

# Specification

[ Model : HTW-440A / 2013.1.21 version ]



**Cara Audio Corporation**


No.69, Lane 762, Dingzhong Road, Sanmin District, Kaohsiung City, Taiwan, ROC.


Tel: 886-7-310 5786 / Fax: 886-7-310 0783

E-mail: [carawang@hueytung.com.tw](mailto:carawang@hueytung.com.tw) / <http://www.hueytung.com.tw>


# 揚聲器製品規格書 SPEAKER SPECIFICATION

型號 Model Number: HTW-440A

項目 Items		規格 Specification	
1	公称阻抗 Nominal Impedance	4Ω±5% at 500 Hz 1.0v	
2	最低共振周波数 Lowest Resonance Frequency	110 Hz±20%Hz Without a baffle	
3	实效周波数带域 Effective Frequency Range	F0~20KHz -10dB	
4	出力音压 Output Sound Pressure Level	81dB±3dB 1W/1M at (400,600,800,1000)Hz AVE.	
5	入力 Input	定格入力 Rated input 15 W	最大入力 Maximum input 20 W
6	磁束密度 Flux Density	-----±10% GAUSS	
7	异常音试验电压 Buzz & Rattle Test	Must be normal at sine wave 5.48 V	
8	动作试验电压 Operation Test	Must be normal at program source 7.75 V	
9	极性 Polarity	左爲正極	
10	磁石尺寸/重量 Magnet Dimension/Weigh	Magnet:60*32*15 Y30 Sub Magnet: 11*2 N35	/G
11	连续负荷试验 Life Test	IEC268-5 noise 96 hours	
12	耐热试验 Heat Resistance	70°C±5°C 30%-35%RH 8Hours and then room temperature 1 hours	
13	耐湿试验 Humidity Resistance	40°C±2°C 90%-95%RH 8Hours and then room temperature 1 hours	
14	耐寒试验 Cold Resistance	-25°C±2°C 24Hours and then room temperature 1 hours	
15	落下试验 Drop Test	1M 75°±2°	
16	绝缘耐压试验 Insulation Resistance	Or more 0.5MΩ 以上	
17	周波数特性 Frequency Response Curve	参照附图 On Other Drawing	
18	失真率 Distortion	/	
19	各部 材质	Cone Paper	PP + Rubber + PEI
		Voice Coil	AL 20 φ x4 Ω
		Cap	/
20	总重量 Total Weight	/	
	Size: 4"	Approve:	Check:
	試作發行: 2008.03.18	Arthur	John
			Design: LIU

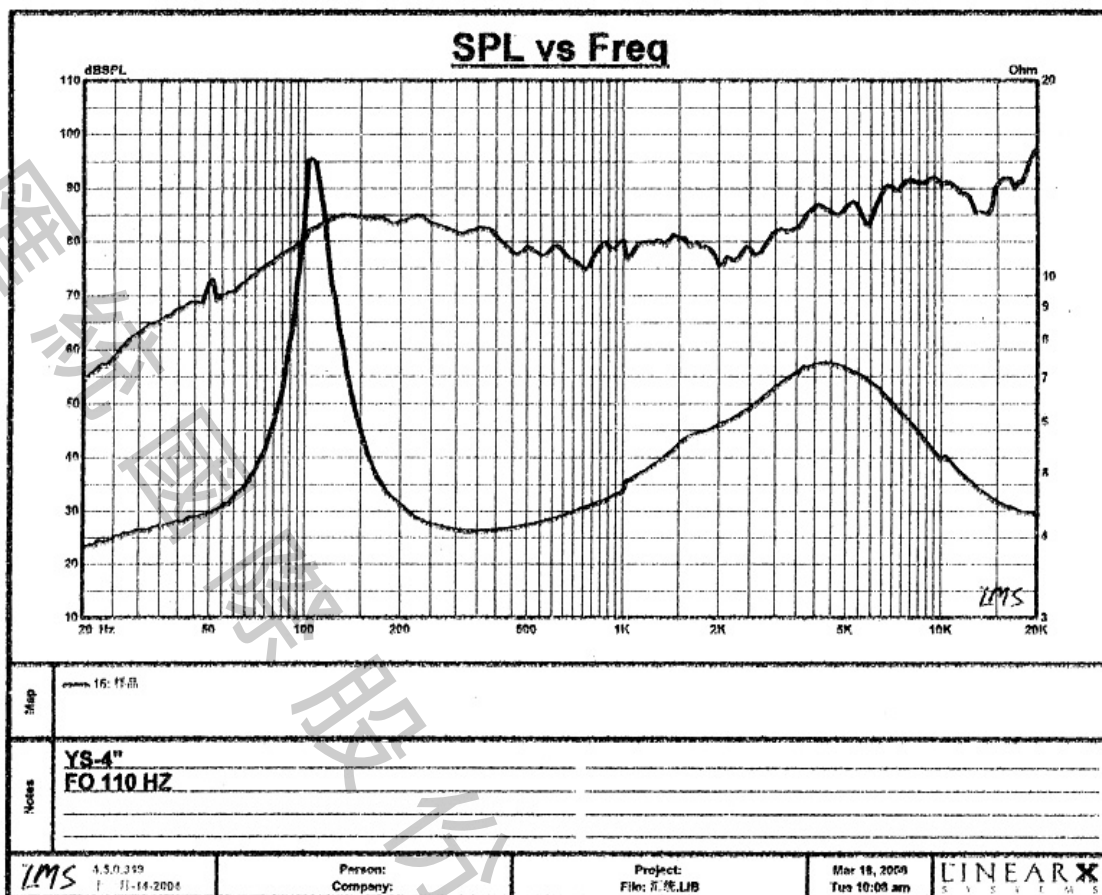

成品圖及照片 Mechanical Dimensions : HTW-440A

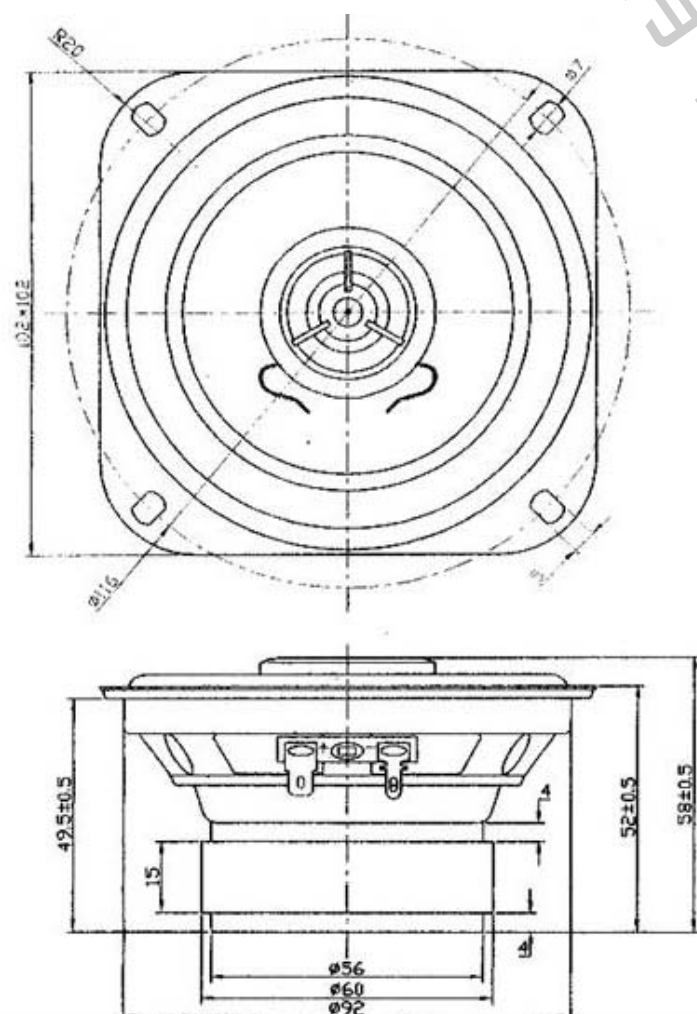

Scale: 1:1  
 Toerance:  $\pm 0.2$   
 Unit: mm