

揚聲器製品規格書

SPEAKER SPECIFICATION

Neodymium Woofer


HT-10ND65



Model : HT-10ND65

specifications		thiele & small parameters		mounting information	
Size	250mm(10in)	Fs	66 Hz	Overall Diameter	260mm(10.2 in)
Impedance	8Ω	Re	5.6Ω	Bolt Circle Diameter	248mm(9.7 in)
D.C.Resistance	5.6Ω	Qes	0.46	Baffle Cutout Diameter	234mm(9.2 in)
Nominal Power	300w	Qms	7.12	Depth	118mm(4.6 in)
Maximum Power	600w	Qts	0.43	Flange and Gasket Thickness	12mm(0.47 in)
Sensitivity(1W/1m)	95.4dB	Vas	37 Ltr	shipping information	
Frequency Range	Fs-3KHz	Sd	356cm ²	Net Weight	1.8kg(4.0 lb)
Voice Coil Diameter	65mm (2.5 in)	Xmax	±2.5mm	Shipping Weight (4units)	2.3kg(5.1 lb)
Winding Material	Aluminium	Mms	28.6g	Shipping Box (4 units)	275*275*120mm
Former Material	Glass Fibre	Bl	12.0 T.m		(10.8*10.8*4.7in)
Winding Depth	15mm (0.60in)	Le	419m mH		
Magnetic Gap Depth	10mm(0.4in)				
Flux Density	1.25T				
Magnet Material	Neodymium Inside Slug				
Also available in 4Ωand 16Ω · data upon request					

SPL vs Freq

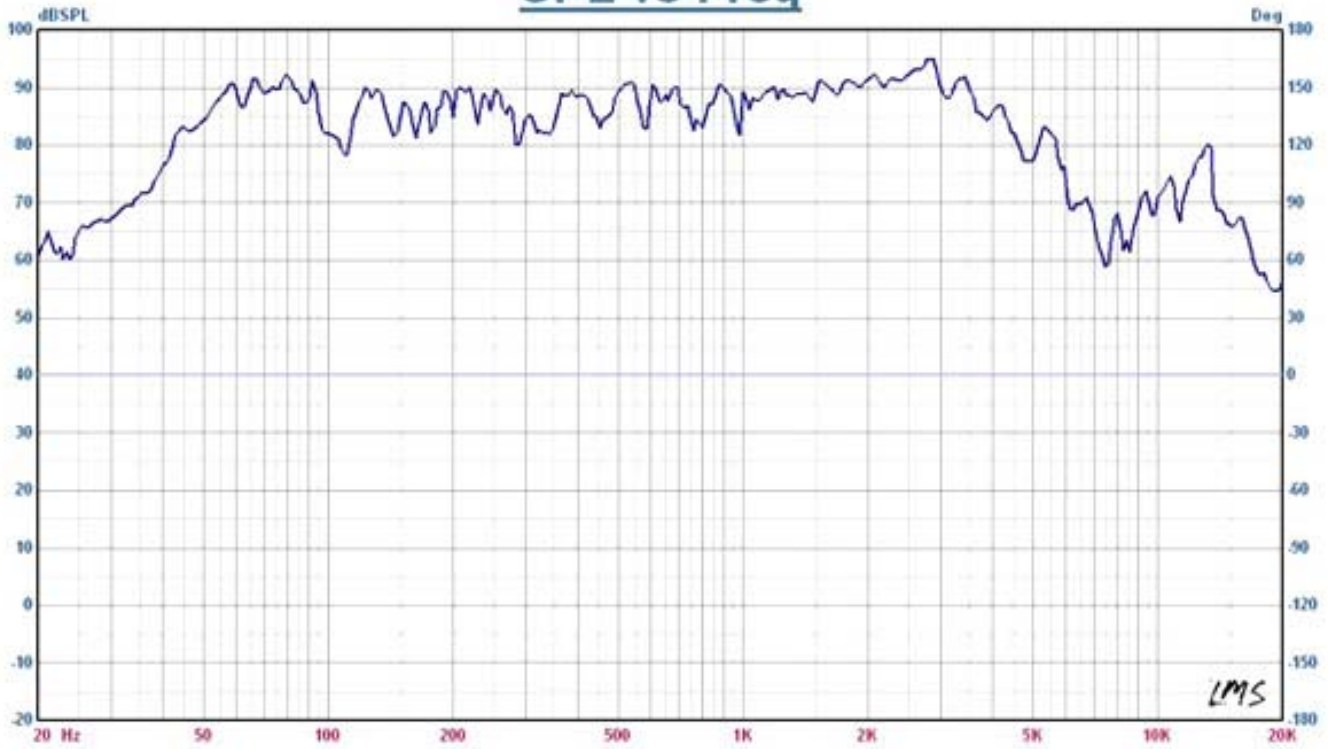

Impedance vs Freq

